

## 0/1-10V Constant Voltage LED Driver

Model No.: LN-75-12, LN-75-24



LN-75-12




LN-75-24



### Features

- Dimming interface: 0-10V, 1-10V, 10V PWM, Resistor, AC Push-Dim
- Universal AC input / Full range
- 1 channel constant voltage output, Max. total output power 75W
- Synchronize on multiple number of LED drivers
- Over-heat / Overload / Short circuit protection, recover automatically
- Full protective plastic case
- Suitable for indoor LED lighting application
- 5 Year, 50,000hr warranty

### Mechanical Structures and Installations



### Technical Parameters


Model	LN-75-12	LN-75-24		
Output	Output Voltage	12VDC	24VDC	
	Output Current	Max. 6.25A	Max. 3.125A	
	Output Power	Max. 75W		
	Dimming Range	0~100%		
	Ripple & Noise	<=200mV/230VAC		
	PWM Frequency	500Hz		
	Rise Time	500ms/115VAC, 424ms/230VAC		
Input	Hold Time	3.6ms/115VAC, 4.5ms/230VAC		
	Input Voltage Range	100VAC~240VAC		
	Frequency Range	50/60Hz		
	Efficiency	90%/230VAC		
	Alternating Current	1.29A/115VAC, 0.74A/230VAC		
	Inrush Current	Cold start 27.5A at 230VAC		
	Leakage Current	<5mA		
	No Load Power	1W/115VAC, 1.5W/230VAC		
	Protection	Over Load Power	Shut down the output when current load >= 120%~150%, auto recovers.	
		Short Circuit	Shut down automatically if short circuit occurs, auto recovers.	
Over Temperature		Intelligently adjust or turn off the output current if the PCB temp > 100°C, auto recovers.		
Environment	Working Temperature	-30°C~50°C		
	Tease Max	70°C		
	Working Humidity	20%~90%RH, non-condensing		
	Storage Temperature/Humidity	-40°C~80°C, 10%~95%RH		
	Temperature Coefficient	±0.03%/°C (0-50%)		
	Vibration Resistance	10-500Hz, 2G, 6min/cycle, X,Y,Z axes/2min		
	IP Rating	IP20		
Safety&EMC	Security Specifications	IEC/EN61347-1, IEC/EN61347-2-13		
	Withstand Voltage	1/PO/P: 3750VAC		
	Insulation Resistance	1/PO/P: 100MΩ/500VDC/25°C/70%RH		
	EMC Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3		
	EMC Immunity	EN61000-4-2, 3.4.5, 6.8.11, EN61547		
Certifications	CE, EMC			

### Applications

- Suitable for LED related fixture or appliance which use LED light bar and LED tape (like LED Decoration or Advertisement devices).
- Office / Commercial / Domestic Lighting, Hotels, Retail and Display.
- Use for retrofit upgrades & new luminaire designs.


## Wiring Diagram

### 1. 0/1-10V Connection

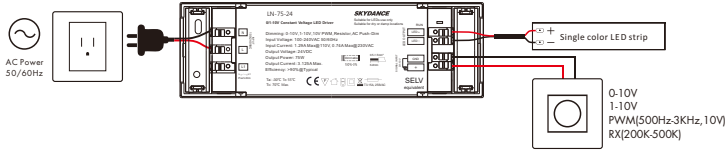

- The 0/1-10V input is operable via commercially available simple rotary wall switches designed for 0/1-10V dimming equipment or from dedicated system central dimming controllers.
- Compliant with 0-10V, 1-10V, 10V PWM, RX(4 in 1).
- We recommend the number of LED drivers connected to 0/1-10V dimmer does not exceed 5 pieces, The maximum length of the wires from dimmer to LED driver should be no more than 15 meters.
- If the LED driver be used with the RF remote or Push-Dim interface prior to using the 0/1-10V interface, the 0/1-10V signal should change over 10% to return 0/1-10 V control.

### 2. AC Push-Dim connection

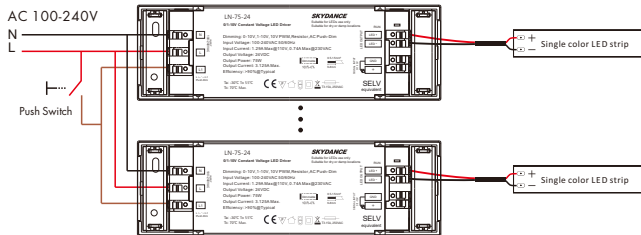

The provided AC Push-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches.

- **Short press:**  
Turn on or off light.
- **Long press (1-6s):**  
Press and hold to step-less dimming, With every other long press, the light level goes to the opposite direction.
- **Dimming memory:**  
Light returns to the previous dimming level when switched off and on again, even at power failure.
- **Synchronization:**  
If more than one LED driver are connected to the same push switch, do a long press for more than 10s, then the system is synchronized and all lights in the group dim up to 100%. This means there is no need for any additional synchrony wire in larger installations. We recommend the number of LED drivers connected to a push switch does not exceed 25 pieces, The maximum length of the wires from push to LED driver should be no more than 20 meters.

## Dimming Curve

